




373T/MD RUGGED MEDICAL TABLET

Slim, Antimicrobial, ANSI/AAMI ES60601-1 Certified Tablet for Efficient Operations

The 373T/MD Rugged Medical Tablet features the integration of a huge 17" LCD touchscreen and a high-performance, energy-efficient Intel® Core™ i 10-core processor within a slim, lightweight, and durable enclosure. With built-in Wi-Fi and BT connectivity, patient data can be exchanged and transmitted within split seconds, the 373T/MD also features with front and back cameras enable instant image capture to optimize the record-keeping and monitoring of patient health status. The design of the optional back service door provides an additional set of I/O ports, including 3 USB Type-A ports, 1 COM port, DC-in jack and DC-out jack or RJ45, to significantly enhance the functionality of the 373T/MD Rugged Medical Tablet in healthcare scenarios.

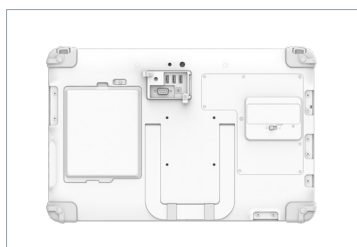

Features

- 17" LED-Backlit LCD touchscreen, supports digital pen
- Intel® Core™ i processor
- Microsoft® Windows® 10/11 IoT Enterprise or Ubuntu OS
- NIST compliant BIOS available
- VESA mounting compatibility for easy installation and optimized mobility
- 5MP front & 8MP back cameras
- IP65-rated front panel
- MIL-STD-810G for shock and vibration protection
- Hot-Swappable battery pack

Major Options

- CAC Card Reader
- Back service door with an additional set of I/O ports
(3 x USB Type-A, 1 x COM port, 1 x DC-in jack, 1 x DC-out jack or 1 x RJ45 out)

Specifications



Model	373T/MD
System	
CPU	Intel® Core™ i5-1335U, 10-Core, up to 4.6 GHz Intel® Core™ i7-1355U, 10-Core, up to 5.0 GHz
RAM	8GB to 32GB
Storage	64GB to 2TB Flash
Operating System	Microsoft® Windows® 10/11 IoT Enterprise or Ubuntu
NIST Compliance	NIST Compliant BIOS Available
Camera	5MP Front & 8MP Back Camera
Trusted Platform Module	fTPM 2.0
Display	17" LED-Backlit LCD Touchscreen
Display Resolution	1980 x 1080 (Optional: 3840 x 2160)
Microphone	Built-In Microphone
Speaker	Built-In Speaker
Network Interface	
WLAN	Wi-Fi 802.11ax, 2.4/5/6 GHz Dual Band
BT	Yes

I/O Interface	
USB Ports	6 x USB Type-A (3 at the Right Side, 1 at the Left Side, and 2 at the Bottom); 1 x USB Type-C (Optional: Additional 3 x USB Type-A Ports at the Optional Back Service Door)
Headphone Jack	1 (3.5 mm)
COM Port	(Optional: 1 at the Optional Back Service Door)
Ethernet port	1, (Optional: 1 at the Optional Back Service Door DC & RJ)
DC-In	(Optional: 1 at the Optional Back Service Door DC & RJ)
DC-Out	(Optional: 1 at the Optional Back Service Door DC only)
Smart Card Reader	1
Control Buttons	1 x Power Button, 3 x Programmable Buttons

Mechanical and Environmental	
Back Service Door	Back Service Door DC: Back service door with an additional set of I/O ports (3 x USB Type-A, 1 x COM port, 1 x DC-in jack, and 1 DC-out jack) *Eliminates 3 right side USB & 2 bottom USB ports Back Service Door RJ: Back service door with an additional set of I/O ports (3 x USB Type-A, 1 x COM port, 1 x DC-in jack, and 1 RJ45 out) *Eliminates 2 bottom USB ports
AC/DC Adapter	Input: 100-240V AC; Output: 19V DC, 6.31A 120W
Battery Pack	Hot-Swappable Battery (11.4V, 5400mAh 60W or 8000mAh 90W)
Enclosure	ABS + PC Plastic and Magnesium-Aluminum Alloy with Antimicrobial Enclosure
Dimensions (H x W x D)	16.9 x 11.1 x 1.06 in/430 x 282 x 27 mm
Weight	4.41 lbs/2 kg
VESA-Compliant Mounting	75 x 75 mm VESA Standard
Durability	IP65-Rated Front Panel
Regulatory	ANSI/AAMI ES60601-1, CE, FCC Class B, RoHS, UL
Temperature	Operation: -10°C ~ 50°C (-14°F ~ 122°F) Storage: -55°C ~ 70°C (-67°F ~ 158°F)
Humidity	0% ~ 90% Non-Condensing

Major Options	
CAC Card Reader	Full-Slot (Reads ISO 7816 T=0, T=1); 1.8/3/5V Smart Card
Back Service Door	An Additional Set of I/O Ports, Including 3 x USB Type-A, 1 x COM Port, 1 x DC-In Jack, and 1 x DC-Out Jack or 1 x RJ45 out

*Specifications subject to change without notice.

Accessories

The 373T/MD Tablet has customized accessories to meet numerous deployment needs.

Digital Pen	
Pen Tip	Diameter: 0.059 in/1.5 mm, Replaceable
Buttons	2 x Side Buttons (Right-Click & Eraser)
Battery	1 AAAA, Replaceable
Color	Black
Dimensions	Length: 5.5 in/140 mm (Pen Tip Included) Diameter: 0.38 in/9.7 mm
Weight	0.055 lbs/25 g



Battery Charging Kits



Battery Pack



3-Slot Battery Holster

